
12V IR Remote & touch control LED Floor Light

12V IR Remote & touch control LED Floor Light







Product functions

- High quality LED light source, uniform and eye friendly
- Bright and uniform soft light, no visible flash
- Support RGB static and dynamic mood lighting
- Support touch to adjust brightness, color temperature(CCT) and change to night light modes.
- Magnetic IR remote controller can be adsorbed on the light pole, support timer function
- Support memory function, boot to keep the state before shutdown
- 360° Gooseneck hose make the direction can be adjusted freely
- Modular design lamp head, replaceable.
- Strong non-slip base, stable, will not topple
- The product is easy to install and can be disassembled and assembled easily.
- 12VDC low voltage power supply, low power consumption, safe to use and energy saving.




Switch button

 Night light	 Adjust brightness	 Color temperature(CCT) switching	 Turn ON/OFF light
<p>Circulate on turn on - night light</p> <p>RGB & static color switch - turn off</p> <p>- turn on</p>	<p>The brightness can be adjusted in 4 levels: 25%、50%、75% and 100%. 75% As defaulted</p> <p>Stepless dimming: Long press for over 3 seconds, brightness can be adjusted between 1%-100%</p>	<p>The CCT can be adjusted in 5 levels:</p> <p>3000K - 6000K cyclic switching (warm white 100%, warm white 75%+cool white 25%, warm white 50%+cool white 50%, warm white 25% + cool white 75%, and cool white 100%)</p>	<p>When turn on, the light gradually bright up in 0.2 seconds. When turn off, the light turned off directly.</p>

Instruction for remote control

1	ON/OFF switch button for lighting
2	ON/OFF switch button for mood lighting
3	RGB static color switching
4	RGB dynamic color switching
5	15 minutes timer
6	1 hour timer
7	30 minutes timer
8	3000K
9	4500K
10	6000K
11	Brightness adjustment
12	CCT adjustment

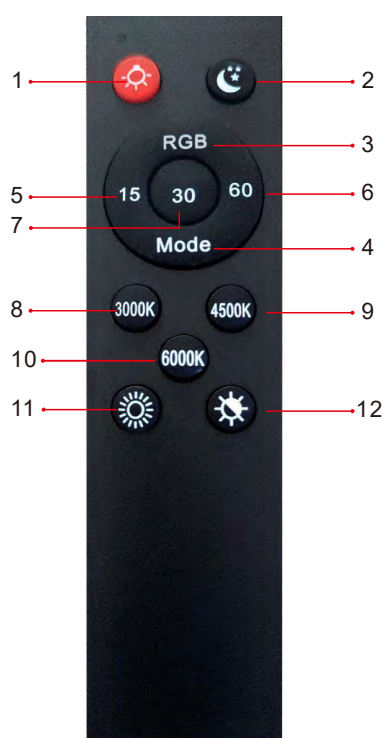

Application scenes: widely applied in living room, corner, home office, bedroom lighting etc.



Parameters

Model	LD-02
Materials&finish	ABS+PC+Iron txturing+abrasive blasting
Dimension	680*210*1500mm
Light colors	RGB2835
Working voltage	DC 12V
Rated power	9W
Color temperture(CCT)	3000-6000K
CRI	≥80
Installation	3 segments splicing
Remote control distance	5-10m ²
Lumens	420LM
Lighting area	0-5m

Packing list

- ◎ Lamp head × 1
- ◎ Light pole × 3
- ◎ Remote control × 1
- ◎ User manual × 1
- ◎ Power adapter × 1

Packing info.

- ◎ Color Box size: 440x240x80mm
- ◎ Carton size: 460X340X265mm
- ◎ Qty/ctn: 4PCS
- ◎ G.W/ctn: 14.5KG