RGB WiFi+BLE Music digital strip kit

DI Digital
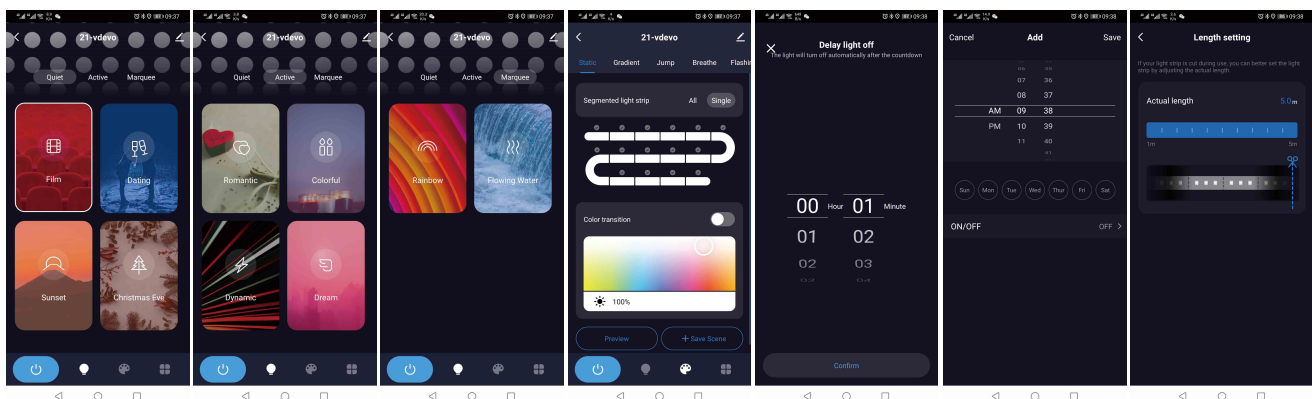
Powered by tuya intelligence inside

Product Function

▶ Mellow and full shape, elegant design – The new controller has a novel and fashionable appearance, patent protected.

▶ Various installation solutions, wide application, easy install.

▶ 16 million colors for options, there is always a color that suits your mood;

▶ Wi-Fi+BLE dual mode communications, faster internet connection, Wi-Fi or bluetooth control after connection.

▶ Remote control available after connected.

▶ 5m/roll RGB+IC digital LED strip, APP control and realize various magic color effects like rainbow and running water etc.

▶ Third party intelligent voice control supported, work with Alexa, Google Assistant etc.

1 × power adapter, 1 × smart controller, 1 × 5m LED strip, 1 × user manual.
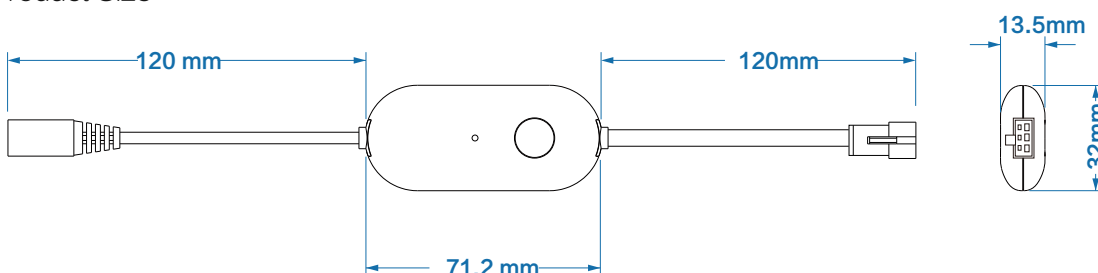
Product Parameters

Plug-in power adapter		Smart Controller		LED strip	
Plug type	US plug	Model	SCWNC6-23	Model	CL-5050RGB024HL12-W10
Input voltage	100-240VAC 50-60Hz	Voltage	DC 12V	Voltage	DC 12V
Plug type	EU / AU / UK plug	Colour	RGBIC	Colour	RGB
Input voltage	220-240VAC 50-60Hz	Current	Max. 1.5A	Power	Max.18W
Output voltage	DC 12V	Power	Max. 18W	IP rating	IP65
Current	Max. 1.5A	Connection	WIFI+Bluetooth	LED QTY	120 LEDs / 5m
Power	Max. 18W	IP rating	IP40	Min Cut-Size	125 mm
		Dimension	W71.2*L32*H13.5mm	Dimension	W10*L5000 mm
		Sorting interface	V+ DIN V-		

APP Features

QR code for APP download

Product Size

120 mm   120mm   13.5mm   32mm   71.2 mm

Smart Controller

Input voltage: DC12~24V

Function button

Connection port of LED strip
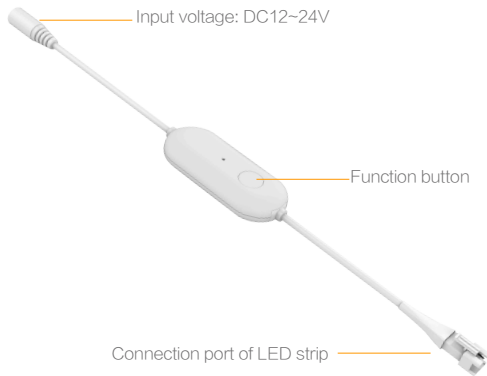
Attention

1. Please start the APP(Smart Life) for operation according to the user manual.

2. Make sure WIFI signal stable and running at 2.4G Hz of frequency.

3. The input voltage of LED strip should be same as output voltage of power adapter and smart controller.

4. The APP of Smart Life compatible with both Android and IOS system.

5. Remote control after connecting to internet.

6. If the lights not react to the operation, it might be caused by the unstable WIFI signal. Please wait and operate again after the WIFI signal become normal.

7. The accessories not included in the kit set, please contact our sales if you need the accessories.

Package information

Model	Color Box size	Carton size	Qty/ctn	G.W/ctn
STWNC6−23T5	170*170*70mm	360*360*370 mm	20PCS	9.6KG

Product connection diagram

1. Download the APP: Smart Life. The APP compatible with both Android and IOS system;

2. Install the LED strip to the specified position, and connect the LED strip to smart controller and power adapter.

3.Pairing the APP to the smart controller with WIFI signals according to the user manual.

SHENZHEN CL LIGHTING TECHNOLOGY CO., LTD.	TEL: 0755 2350 4891	Email: CL@banqcn.com	www.cl-light.com