

Smart LED strip kit

(1 band 1)

RGBIC+CCT WiFi+BLE+IR Digital Music Sync LED Strip Kit



Dream
color



Remote
control




Product function

- WiFi+BLE dual mode communication protocol, fast network pairing.
- Various dream color lighting modes switch freely, include flowing water, rainbow, flashing, and gradient effect etc.
- RGBIC+CCT 5 color light sources with controlled IC, 16 million colors, freely adjust the colors, CCT and brightness.
- Music sync functions, various and customizable music modes available, synchronization effects of sounds and lights.
- Various DIY user experiences available include Timer, group control, sharing accounts, and customized modes etc.
- Work with Alexa, Hey Google, Xiaodu etc.




APP function

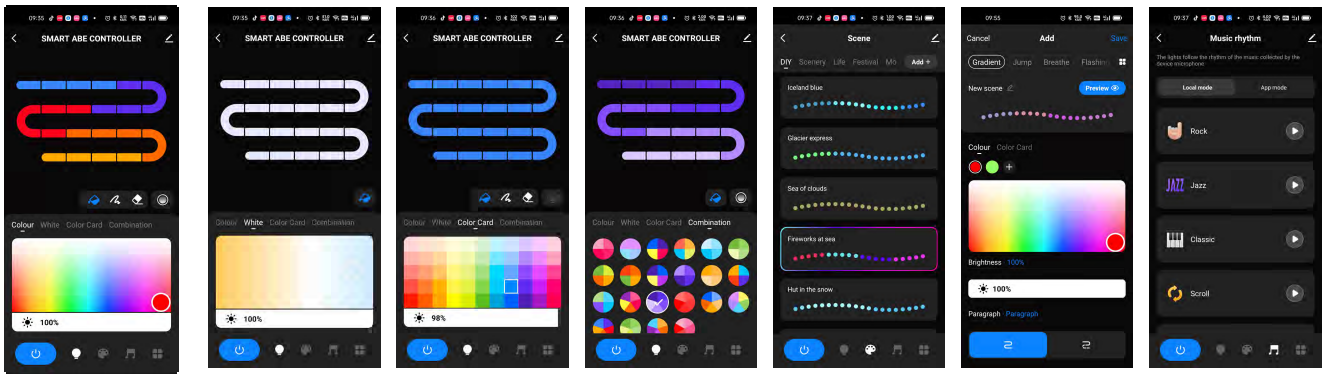


Remote control function

Button cell battery power supply, 3V working voltage. Control distance: 5-8 meters in open area. 20-keys IR remote can realize various dream color lighting effects and various music modes.

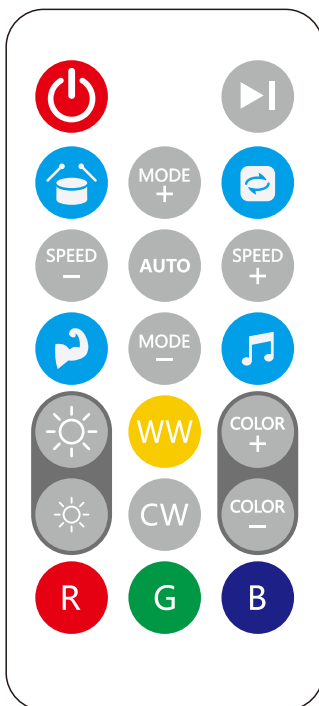

Features	Action	Remote control buttons
Turn on/off	Press	
Music mode pause/start	Press	
Speed/sensitivity	Press	
Dynamic mode switching	Press	
Music mode	Press	
Automatic mode	Press	
Brightness adjustment	Press	
Static color switching	Press	
Warm White	Press	
Cool white	Press	
R G B	Press	


Smart Controller

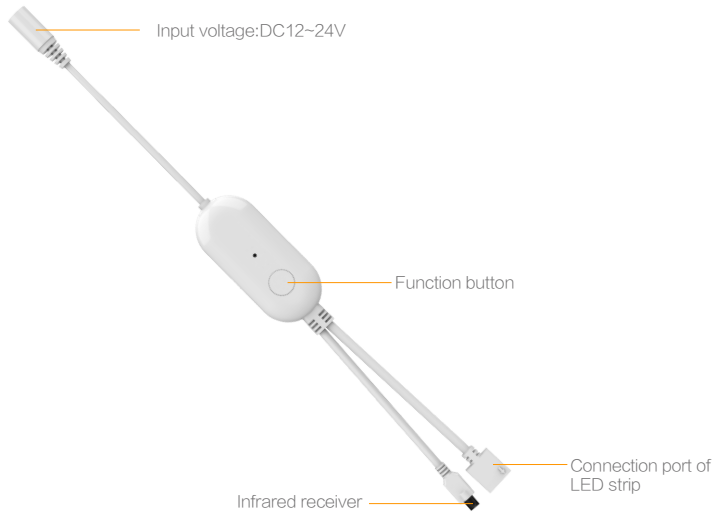

Attention


1. Please start the APP(Smart Life) for operation according to the user manual.
2. Make sure the WIFI signal is stable and running at 2.4GHz of frequency.
3. The input voltage of the LED strip should be the same as the output voltage of the power adapter and smart controller.
4. The APP of Smart Life compatible with both Android and IOS systems.
5. Remote control after connecting to the internet.
6. If the lights do not react to the operation, it might be caused by the unstable WIFI signal. Please wait and operate again after the WIFI signal become normal.
7. The accessories not included in the kit set, please contact our sales

Product Size

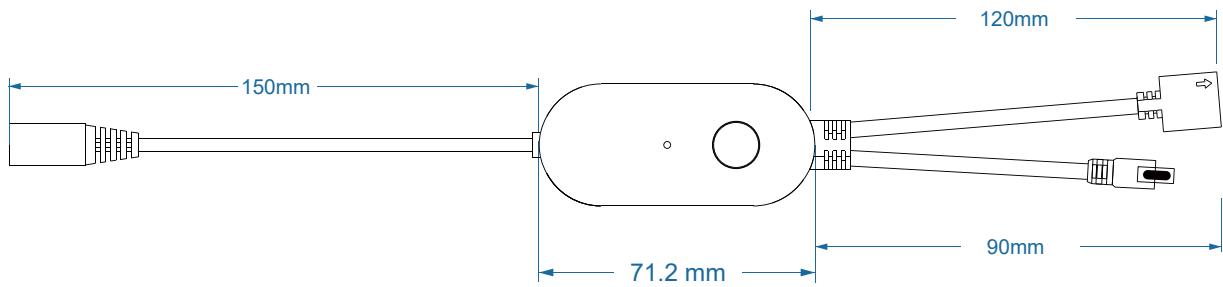

Product connection diagram

1. Download the APP: Smart Life. The APP compatible with both Android and IOS systems;
2. Install the LED strip to the specified position, and connect the LED strip to the smart controller and power adapter.
3. Pairing the APP to the smart controller with WIFI signals according to the user manual.

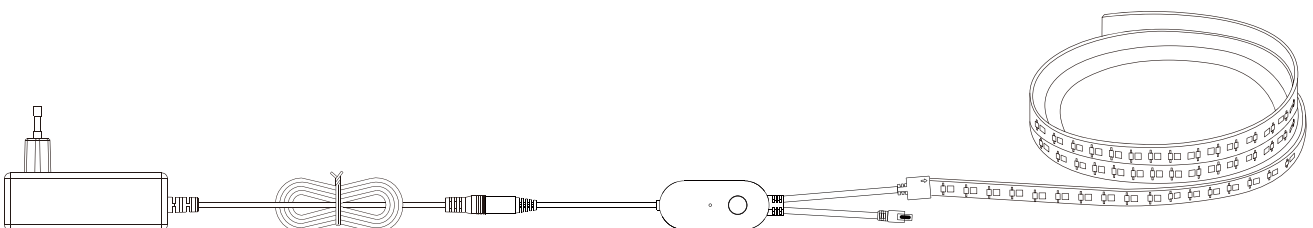

Product application



Product parameters

Plug-in power adapter		Smart Controller		LED strip	
Plug type	US plug	Model	STWSC6-25	Model	CL-5050RGB+XW072HY12-W12
Input voltage	100-240V AC 50-60Hz	Voltage	DC 12V	Voltage	DC 12V
Plug type	EU / AU / UK plug	Colour	RGB+CCT	Colour	RGB+CCT
Input voltage	220-240V AC 50-60Hz	Current	Max. 2A	Power	Max.18W
Output voltage	DC 12V	Power	Max. 24W	IP rating	IP65
Current	Max. 1.5A	Connection	APP (Smart Life)	LED QTY	360LEDs/5m
Power	Max. 18W	IP rating	IP40	Min Cut-Size	125 mm
		Dimension	W71.2*L32.8*H13.2mm	Dimension	W12*L5000 mm

Packing list

- ◎ Power adapter × 1
- ◎ Smart controller × 1
- ◎ 5m LED strip × 1
- ◎ 3M adhesive × 1
- ◎ User manual × 1

Packing info.

- ◎ Color Box size: 170 × 170 × 70mm
- ◎ Carton size: 365 × 355 × 360 mm
- ◎ Qty/ctn: 20PCS
- ◎ G.W/ctn: 9.6KG